


- 19" plug-in module
- Primary/secondary insulation 3000 VAC
- Overvoltage protection
- Output permanent short-circuit proof
- Remote on/off possible
- Interference emission according to EN 55011 / EN 55022 Class B
- Outputs SELV according to EN 60950

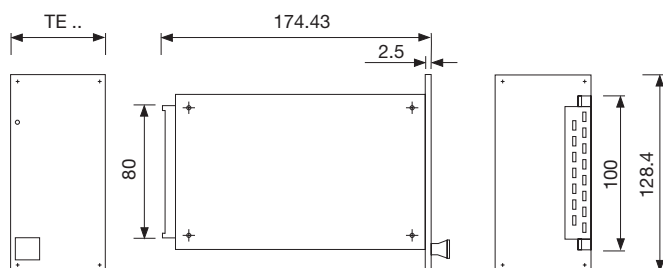

3HE

Front panel 8TE - 40.8

ORDER DATA								<i>Order numbers in italics</i>			
Vo1	Io1	Vo2	Io2	Vo3	Io3	Width	Height	Type No. for input voltage ranges			
V	A	V	A	V	A	TE	HE	8.5 - 18 VDC	18 - 40 VDC	40 - 80 VDC	80 - 160 VDC
+5	0 - 8	+12	0 - 3	-12	0 - 1	8	3	<i>DG37-05121-1G</i> <i>15.8540.009</i>	<i>DG37-05121-2G</i> <i>15.8540.209</i>	<i>DG37-05121-3G</i> <i>15.8540.409</i>	<i>DG37-05121-4G</i> <i>15.8540.609</i>
+5	0 - 8	+15	0 - 1	-15	0 - 1	8	3	<i>DG37-05151-1G</i> <i>15.8540.109</i>	<i>DG37-05151-2G</i> <i>15.8540.309</i>	<i>DG37-05151-3G</i> <i>15.8540.509</i>	<i>DG37-05151-4G</i> <i>15.8540.709</i>
Additionally:											
Front panel (nature anodized)								<i>33.1571.006.011</i>			
Assembly kit for DIN-rail								<i>15.7140.000.190</i>			
Assembly kit for wall mounting								<i>15.7140.000.290</i>			

