

# ECOsine® high power passive harmonic filter modules



- Compact filter for quick installation and easy commissioning
- Cost-effective enclosed passive harmonic filter
- Optimized for motor drives with DC-link chokes
- Helps to comply with international power quality standards
- Supports an efficient utilization of electrical system capacity
- Filters for thyristor (SCR) rectifiers



## Approvals



## Typical application

Schaffner ECOsine® filter cabinets can be applied to virtually any kind of power electronics with front-end six thyristor rectifiers, where harmonic current distortion needs to be reduced to defined limits. The compact filter cabinets can be easily commissioned and quickly installed into existing designs without requiring an in-depth system analysis or highly trained specialists.


Typical applications include higher power AC and DC motor drives with either six thyristor used e.g. in HVAC, water/wastewater, oil & gas, or mission critical factory automation equipment. In addition, ECOsine® filters can help to reduce thermal and electrical overload caused by harmonic currents in installations involving UPS, high power rectifiers and other non-linear three-phase power supplies.

## Technical specifications

<b>Nominal operating voltage</b>	3x 380 to 480 VAC
<b>Operating frequency</b>	60 Hz +/- 1 Hz
<b>Total harmonic current distortion THID*</b>	~ 5 % @ rated power with Ldc < 15% @ de-rated power without Ldc
<b>Total demand distortion TDD</b>	According to IEEE-519
<b>Voltage tolerance range</b>	3x 342 to 528 VAC
<b>Nominal motor drive input power rating</b>	300 to 500 HP
<b>Efficiency</b>	≥ 99% @ nominal line voltage and power
<b>High potential test voltage</b>	P → E 2500VAC (2 sec)
<b>Protection category</b>	IP23 for -E2 type filters IP54 for -E5 type filters
<b>Cooling</b>	Forced air
<b>Overload capability</b>	1.6x rated current for 1 minute, once per hour
<b>Ambient temperature range</b>	-25°C to +40°C fully operational -25°C to +85°C transport and storage +40°C to +60°C de-rated operation**
<b>Flammability according to</b>	UL 94V-2 or better
<b>Design corresponding to</b>	UL 508c, EN61558-2-20, CE (LVD 2006/95/EC)
<b>SCCR***</b>	100 kA
<b>Earthing System</b>	TN, TT, IT


\* System requirements: THVD <2%, line voltage unbalance <1%  
Note: SCR rectifier front-end will produce different results, depending upon the firing angle of the thyristors  
\*\* Iderated = Inominal \* √((85°C-Tamb)/45°C)  
\*\*\* External UL-rated fuses required

### Performance characteristics

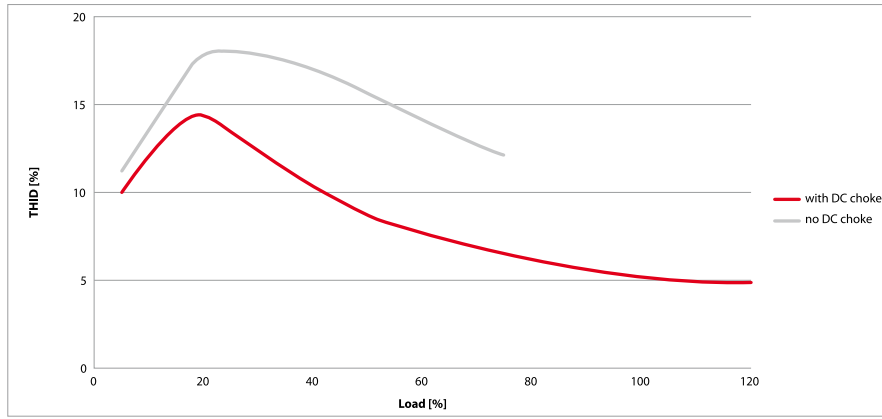

### THID - Total harmonic current distortion


ECOsine® high power passive harmonic filter performance is optimized for rectifiers/motor drives with a dc-link choke. In such applications, a THID of roughly 5% can be expected. The use of a dc-link choke is highly recommended. In a system without  $L_{dc}$ , the filter module has to be derated to max. 70% of its nominal power rating. In such applications, a THID of 10...15% can be expected.

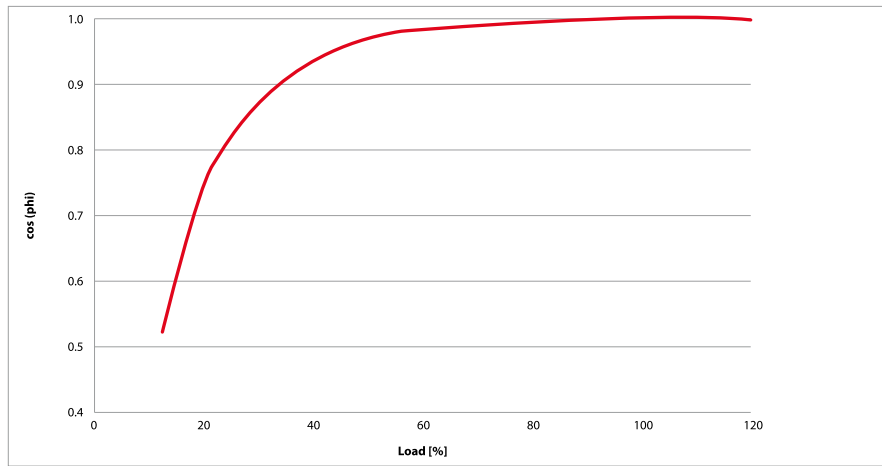

### Displacement power factor

At full load, ECOsine® filters yield unity power factor. At lower load levels, the capacitive current into the power capacitors of the trap circuit cause a leading displacement power factor. This is the case with all types of passive filters with large capacitors. However, compared to traditional filters the useful range of Schaffner ECOsine® is much extended (cos phi >0.9 from 35 to 100% of rated load).

ECOsine® filters allow for trap disconnect at light load to avoid low DPF situations if required. This feature can be provided by the installer using a capacitor contactor of suitable size for the trap circuit.

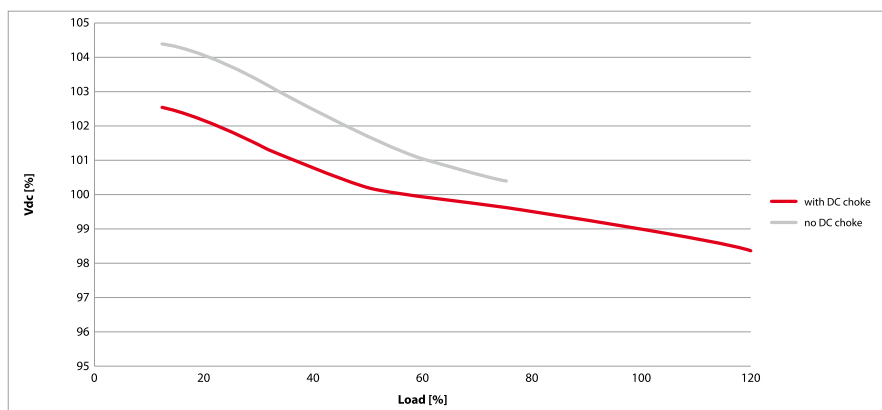

### DC-link voltage

ECOsine® harmonic filters have a very low impact on the dc-link voltage of the motor drive. The voltage variation as function of the load is represented in the performance diagram beside. Tolerances are kept narrow in order to ensure that motor drives do not suffer from noise tripping because of under- or over-voltage conditions.

### Filter selection table (-E2)

Filter	Rated load power* @ 460 VAC/60Hz [HP]	Typ. power loss @ rated load [W]	Weight choke module [kg]	Weight total [kg]
FN 3413-380-99-E2	300	1090	120	235
FN 3413-440-99-E2	350	1400	135	262
FN 3413-490-99-E2	400	1480	150	274
FN 3413-540-99-E2	450	1500	195	341
FN 3413-590-99-E2	500	1520	235	383

\* Power rating for motor drives with dc-link chokes. If no Ldc is available, load power of the filter has to be de-rated to 70% of the specified value above  
In this case, the THID will be between 10-15%


### Filter selection table (-E5)

Filter	Rated load power* @ 460 VAC/60Hz [HP]	Typ. power loss @ rated load [W]	Weight choke module [kg]	Weight total [kg]
FN 3413-380-99-E5	300	1090	120	238
FN 3413-440-99-E5	350	1400	135	265
FN 3413-490-99-E5	400	1480	150	277
FN 3413-540-99-E5	450	1500	195	344
FN 3413-590-99-E5	500	1520	235	386



\* Power rating for motor drives with dc-link chokes. If no Ldc is available, load power of the filter has to be de-rated to 70% of the specified value above  
In this case, the THID will be between 10-15%

### Application

ECOsine® filters are best installed directly at the input of 6 thyristor (SCR). It is possible to connect several non-linear loads (e.g. motor drives) in parallel. In this case the rating of the filter must match the sum of the power ratings of loads connected to it.

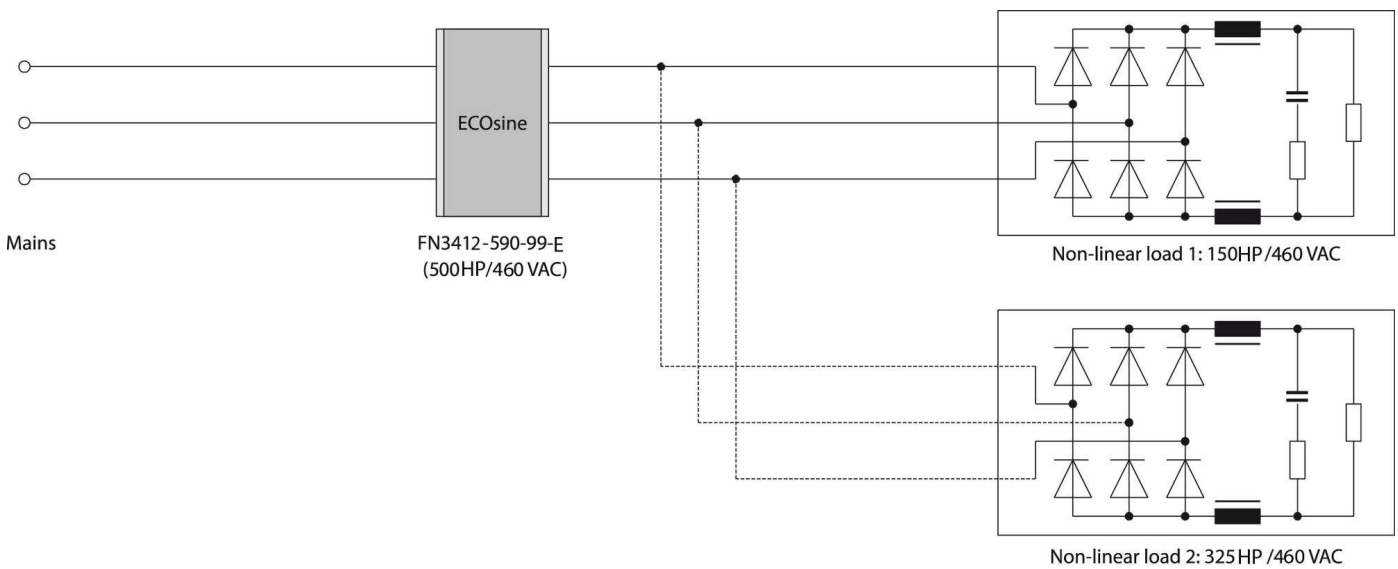

### Mechanical data

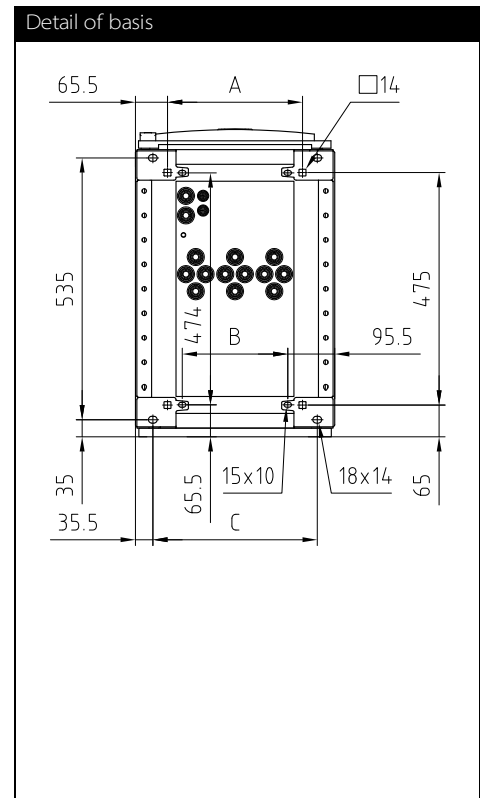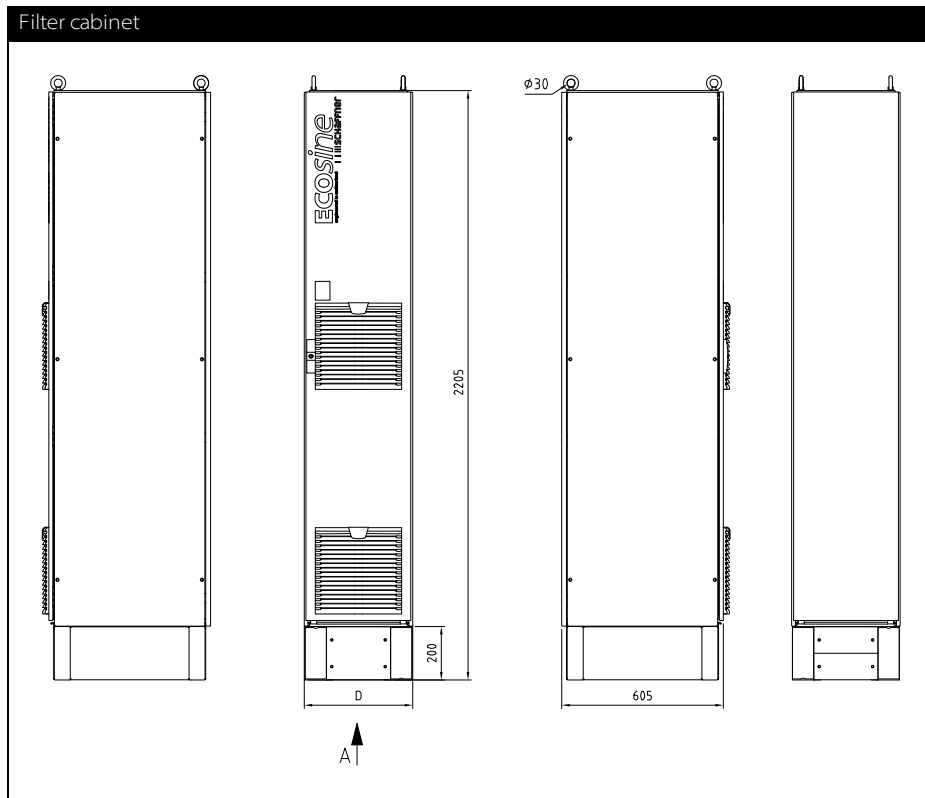

### Dimensions of filter cabinets

Filter cabinet (IP23)	A	B	C	D
FN 3413-380-99-E2	275	215	335	406
FN 3413-440-99-E2	275	215	335	406
FN 3413-490-99-E2	275	215	335	406
FN 3413-540-99-E2	475	415	535	606
FN 3413-590-99-E2	475	415	535	606

Filter cabinet (IP54)	A	B	C	D
FN 3413-380-99-E5	275	215	335	406
FN 3413-440-99-E5	275	215	335	406
FN 3413-490-99-E5	275	215	335	406
FN 3413-540-99-E5	475	415	535	606
FN 3413-590-99-E5	475	415	535	606

All dimensions in mm; 1 inch = 25.4mm  
 Tolerances according: ISO 2768-c (EN 22768-c)



## Headquarters, global innovation and development center

### Switzerland

#### Schaffner Group

Nordstrasse 11  
4542 Luterbach  
T +41 32 6816 626  
F +41 32 6816 630  
[info@schaffner.com](mailto:info@schaffner.com)  
<http://www.schaffner.com>



## Sales and application centers

### China

#### Schaffner EMC Ltd. Shanghai

T20-3, No 565 Chuangye Road  
Pudong New Area  
201201 Shanghai  
T +86 21 3813 9500  
F +86 21 3813 9501 / 02  
[cschina@schaffner.com](mailto:cschina@schaffner.com)  
<http://www.schaffner.com.cn/>

### Finland

#### Schaffner Oy

Sauvonrinne 19 H  
08500 Lohja  
T +358 19 35 72 71  
[finlandsales@schaffner.com](mailto:finlandsales@schaffner.com)

### France

#### Schaffner EMC S.A.S.

112 Quai de Bezons  
Boîte postale 133  
95100 Argenteuil  
T +33 1 34 34 30 60  
F +33 1 39 47 02 28  
[francesales@schaffner.com](mailto:francesales@schaffner.com)

### Germany

#### Schaffner Deutschland GmbH

Schoemperlenstrasse 12B  
76185 Karlsruhe  
T +49 721 56910  
F +49 721 569110  
[germanysales@schaffner.com](mailto:germanysales@schaffner.com)

### Italy

#### Schaffner EMC S.r.l.

Via Galileo Galilei 47  
20092 Cinisello Balsamo (MI)  
T +39 02 66 04 30 45 /47  
F +39 02 61 23 943  
[italysales@schaffner.com](mailto:italysales@schaffner.com)

### Japan

#### Schaffner EMC K.K.

1-32-12, Kamiyama, Setagaya-ku  
7F Mitsui-seimei Sangenjaya Bldg.  
154-0011 Tokyo  
T +81 3 5712 3650  
F +81 3 5712 3651  
[japansales@schaffner.com](mailto:japansales@schaffner.com)  
<http://www.schaffner.jp>

### Singapore

#### Schaffner EMC Pte Ltd.

Blk 3015A Ubi Road 1  
05-09 Kampong Ubi Industrial Estate  
408705 Singapore  
T +65 6377 3283  
F +65 6377 3281  
[singaporesales@schaffner.com](mailto:singaporesales@schaffner.com)

### Spain

#### Schaffner EMC España

Calle Caléndula 93, Miniparc III, Edificio E,  
Alcobendas  
Miniparc III, Edificio E  
El Soto de la Moraleja  
Alcobendas  
28109 Madrid  
M +34 618 176 133  
T +34 917 912 900  
F +34 917 912 901  
[spainsales@schaffner.com](mailto:spainsales@schaffner.com)

### Sweden

#### Schaffner EMC AB

Turebergstorg 1, 6  
19147 Sollentuna  
T +46 8 5792 1121 / 22  
F +46 8 92 96 90  
[swedensales@schaffner.com](mailto:swedensales@schaffner.com)

### Switzerland

#### Schaffner EMV AG

Nordstrasse 11  
4542 Luterbach  
T +41 32 681 66 26  
F +41 32 681 66 41  
[switzerlandsales@schaffner.com](mailto:switzerlandsales@schaffner.com)

### Taiwan R.O.C.

#### Schaffner EMV Ltd.

6 Floor, No. 413  
Rui Guang Road  
114 Neihu District Taipei City  
T +886 2 87525050  
F +886 2 87518086  
[taiwansales@schaffner.com](mailto:taiwansales@schaffner.com)

### Thailand

#### Schaffner EMC Co. Ltd.

Northern Region Industrial Estate  
67 Moo 4 Tambon Ban Klang  
Amphur Muang P.O. Box 14  
51000 Lamphun  
T +66 53 58 11 04  
F +66 53 58 10 19  
[thailandsales@schaffner.com](mailto:thailandsales@schaffner.com)

### UK

#### Schaffner Ltd.

5 Ashville Way  
Molly Millars Lane  
Wokingham  
RG41 2PL Berkshire  
T +44 118 9770070  
F +44 118 9792969  
[uksales@schaffner.com](mailto:uksales@schaffner.com)  
<http://www.schaffner.uk.com>

### USA

#### Schaffner EMC Inc.

52 Mayfield Avenue  
08837 Edison, New Jersey  
T +1 800 367 5566  
T +1 732 225 9533  
F +1 732 225 4789  
[usasales@schaffner.com](mailto:usasales@schaffner.com)  
<http://www.schaffner.com/us>

#### Schaffner MTC LLC

6722 Thirlane Road  
24019 Roanoke, Virginia  
T +1 276 228 7943  
F +1 276 228 7953  
<http://www.schaffner-mtc.com>

#### Schaffner Trencos LLC

2550 Brookpark Road  
44134 Cleveland, Ohio  
T +1 216 741 5282  
F +1 216 741 4860  
<http://schaffner-trencos.com>

To find your local partner within Schaffner's global network: [www.schaffner.com](http://www.schaffner.com)

© 2015 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.